

Description

RGBW Colour Changer. IP67*, Class I. Class II on request. IK08. Marine-grade all aluminium construction. Anodized aluminium extrusion. PCS hardware. Silicone rubber gasket. Safety glass lens. Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tyres, at a weight up to 5 tonnes per wheel. Max. static load, 3 tonnes (according to DIN EN 60598-2-13). Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible cable, including sealable junction box SJB. Linear PMMA LED lens. Factory installed LED circuit board. LED boards can be easily removed for upgrading. Luminaire is factory sealed and does not need to be opened during installation. Integral electronic converter with DMX interface in thermally-separated compartment.

The optional installation blackout is recommended for mounting. To be ordered separately.

The luminaire is not suitable for permanent underwater operation and must be switched off in the event of flooding.

* Additionally tested to IP66, IP67, IP68 0.1 bar 3h, up to 1 m depth according to DIN EN 60598 and IP69K/80° according to DIN EN 60529.

ETV130-CC LED

Inground luminaires

Specifications

Material description

Body	Marine-grade all aluminium construction. Anodized aluminium extrusion.
Lens	Safety glass lens; max. static load 3 tonnes
Colours	
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK08

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DMX
Power factor	> 0.9

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	G (Light source)






ETV130-CC LED

Inground luminaires

we-ef

Options

Light distribution

	symmetric linear, wide beam [LB]
	symmetric linear, medium beam [LM]
	symmetric linear, narrow beam [LE]
	symmetric linear, very narrow beam [LEE]
	asymmetric linear, wallwash [LA10]

Colour temperature

RGBW/4K

Nominal Watt

0 W






Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/10/2024


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric linear, wallwash [LA10] 	186-0265	LED-96/48W - RGBW/4K	2921	54 W	20/80	6.00
symmetric linear, medium beam [LM] 	186-0256	LED-96/48W - RGBW/4K	3050	54 W	20/80	6.00
symmetric linear, narrow beam [LE] 	186-0259	LED-96/48W - RGBW/4K	2994.3	54 W	20/80	6.00
symmetric linear, very narrow beam [LEE] 	186-0262	LED-96/48W - RGBW/4K	3428.4	54 W	20/80	6.00
symmetric linear, wide beam [LB] 	186-0253	LED-96/48W - RGBW/4K	2801.8	54 W	20/80	6.00

Electrical Accessories

Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

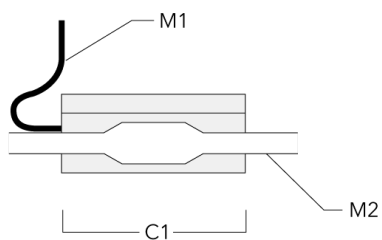


ETV130-CC LED

Inground luminaires

Optical Accessories

Honeycomb louvre


Description	Part ID	C1	H1
IW for ETV130	186-0295	898	30

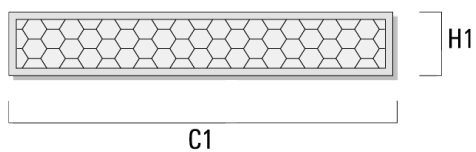

Mounting Accessories

Installation blackout, Type I

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-I-1/927 (1 luminaire)	186-0310	975	160	55	120	4.70

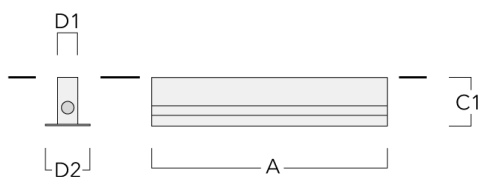


BEV130-I-2/927 (2 luminaires)	186-0311	1904	160	55	120	9
-------------------------------	----------	------	-----	----	-----	---




ETV130-CC LED

Inground luminaires

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-I-3/927 (3 luminaires)	186-0312	2833	160	55	120	13.20

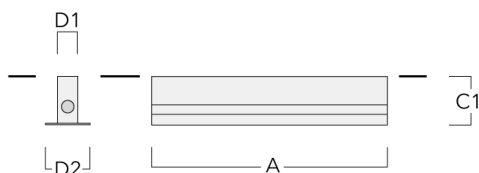

BEV130-I-4/927 (4 luminaires)	186-0313	3762	160	55	120	17.50
-------------------------------	----------	------	-----	----	-----	-------

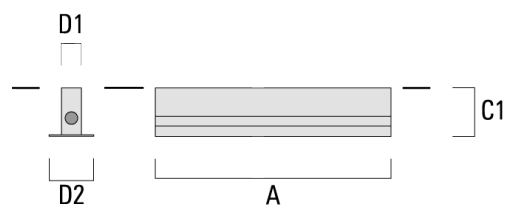

ETV130-CC LED
Inground luminaires

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors.
Generated on 23/10/2024