

Description

Ideal for pathway lighting applications.

IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire head is factory-sealed and does not need to be opened during installation.

Two-sided light output versions for 360° symmetric distribution; one-sided light output versions with 'rearward glow' feature. Luminaire spacing up to 16-26 ft.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/16/2025

Bollards and Pathway Luminaires

Specifications

Material description

Body	Marine-grade, all-aluminum construction
Lens	Polycarbonate
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	Integral 10kV Surge Protector

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Lead Time	This is a new product release and may have an extended lead time.
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>






Subject to technical changes and errors. - Generated on 08/16/2025

KTX234 LED

Bollards and Pathway Luminaires





Options

Light distribution	Color temperature	Nominal Watt
 symmetric distribution [C60]	 3000 K	0 W
 [R65] Type IV Medium	 4000 K	
	 2700 K	

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/16/2025


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
[R65] Type IV Medium 	114-9065	LED-3/9W / 1050 mA - 3000 K	519.7	11 W	80	9.9
	114-9066	LED-3/9W / 1050 mA - 4000 K	543.9	11 W	80	9.9
	114-9067	LED-3/13W / 1400 mA - 3000 K	664.7	14 W	80	9.9
	114-9068	LED-3/13W / 1400 mA - 4000 K	694.9	14 W	80	9.9
	114-9075	LED-3/9W / 1050 mA - 2700 K	495.5	11 W	80	9.9
	114-9076	LED-3/13W / 1400 mA - 2700 K	628.5	14 W	80	9.9
symmetric distribution [C60] 	114-9071	LED-6/18W / 1050 mA - 3000 K	825	21 W	80	9.9
	114-9072	LED-6/18W / 1050 mA - 4000 K	863.4	21 W	80	9.9
	114-9073	LED-6/26W / 1400 mA - 3000 K	1055.3	27 W	80	9.9
	114-9074	LED-6/26W / 1400 mA - 4000 K	1103.3	27 W	80	9.9
	114-9077	LED-6/18W / 1050 mA - 2700 K	786.7	21 W	80	9.9
	114-9078	LED-6/26W / 1400 mA - 2700 K	997.7	27 W	80	9.9

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.50

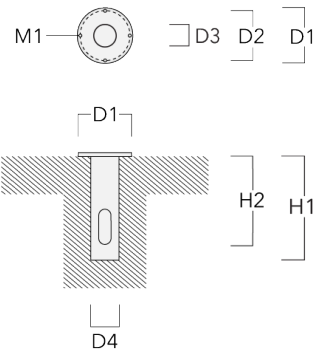

Optical Accessories

Light shield

Description	Part ID	H1	Weight (lb)
LS180 KTY (factory installed)	114-9185	2.59	0.04

