

DOC120 LED [For Remodel]

**Description**

DOC120 LED for remodel projects. For new construction, see DOC120 LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.



A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	5.07 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
T _j	85
Delivered lumens (lm)	
LED Lumen	249.9
Total Lumen	2998.6
T _a	25

DOC120 LED [For Remodel]

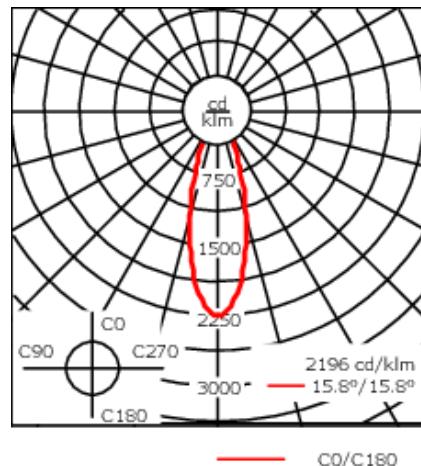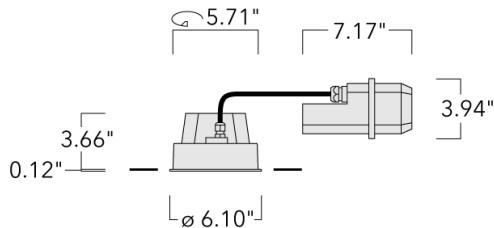**Specifications****Material description**

Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 20px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 15px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 15px; background-color: #D3D3D3; margin-right: 10px;"></div> RAL9016 White <div style="display: inline-block; width: 20px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment


Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

DOC120 LED [For Remodel]


Optical Accessories**Wallwash lens**

Description	Part ID	C1
IO-20-WW-DOC120-LED	134-1746	4.05




DOC120 LED [For Remodel]**Softening Lens**

Description	Part ID	C1
IO-360-DOC120-LED	134-1747	4.05

**Linear spread lens**

Description	Part ID	C1
IO-180-DOC120-LED	134-1745	4.05




DOC120 LED [For Remodel]

Mounting Accessories

Installation blockout

Description	Part ID	A	B	C1	D1
BD012-I	134-1748	15.1	10.7	7.6	6.1

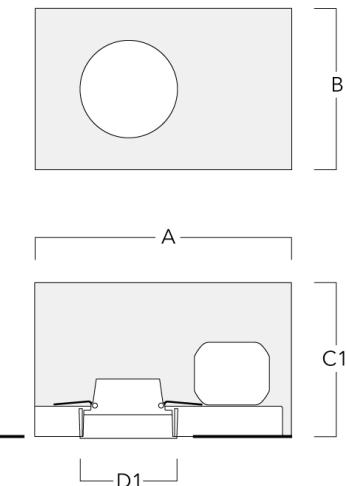

DOC120 LED [For Remodel]

Installation blockout, flush with shadow line

Description	Part ID	A	B	C1	D1	D2
BD012-III	134-1749	15.08	9.13	7.55	6.1	7.8

