## we-ef

#### **DOC120 LED [New Construction]**



#### **Description**

DOC120 LED for new construction. For remodel projects, see DOC120 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX - 9004 (Black)


+ XXX-XXXX (Accessory 1)

Weight	5.07 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	28 W
Nominal Lumen (lm)	
LED Lumen	245.9
Total Lumen	2951
Tj	85
Delivered lumens (lm)	
LED Lumen	211.9
Total Lumen	2542.8
Та	25

# we-ef

## **DOC120 LED [New Construction]**

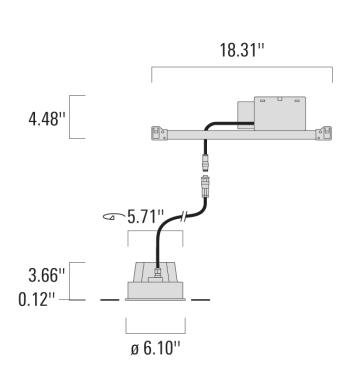

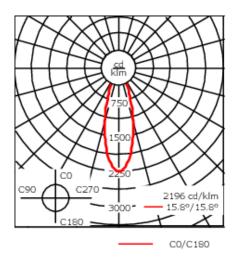

# **Specifications Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	RAL9004 Black
	RAL9007 Grey Metallic
	RAL9016 White
	RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

#### 134-6205



#### **DOC120 LED [New Construction]**

## **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with ord	der.
---	------

Additional inf	ormation
Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

#### 134-6205



#### **DOC120 LED [New Construction]**

# **Optical Accessories**

#### Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC120-LED	134-1746	4.05



# we-ef

#### **DOC120 LED [New Construction]**

## **Softening Lens**

Description	Part ID	C1
IO-360-DOC120-LED	134-1747	4.05



## **Linear spread lens**

cription Part ID	C1
180-DOC120-LED 134-174	4.05



#### **WE-EF LIGHTING USA, LLC**