161-5888

# we-ef

#### FLB141 LED #4 WALL BRACKET MOUNT Asymmetric



#### **Description**

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Mount permits 350° rotation and 180° tilt.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	15.21 lb			
Light distribution	[S70] Type II Short			
Light source	LED-6/18W / 1050 mA - 3000 K			
CRI	80			
Power supply	electronic gear			
LEDs	6			
Rated input power	21 W			
Nominal Lumen (lm)				
LED Lumen	430			
Total Lumen	2580			
Tj	85			
Delivered lumens (Im)				
LED Lumen	266.2			
Total Lumen	1597.1			
Та	25			



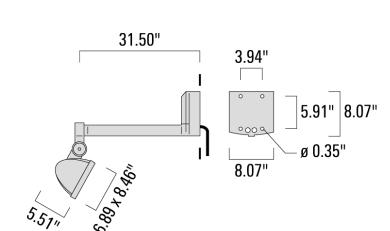



# Specifications Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS hardware

Ingress protection IP66
Impact resistance IK08
Corrosion resistance 5CE



## **Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Driver / Ballast Integral EC electronic converter in thermally-separated compartment


#### **Additional information**



# **Optical Accessories**

### Wire guard


Description	Part ID	C1	H1
Wire guard EG	161-9118	7.13	6.02






#### **Barn doors**

Description	Part ID	Α	H1	
Barn doors ED	161-9119	9.65	5.2	



#### Glare shield

Description
are shield ES





## Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	146-0625	4.33

