

## ETC130-GB-CC LED COLOR CHANGER

**Description**

RGBW/RGBA Color Changer. ASC Lens accessory can be added.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. Color Boost technology. DMX interface. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

Suitable for flush installation in concrete or earth. The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must

Weight	18.20 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/19W - RGBA
CRI	20
Power supply	electronic gear
LEDs	12
Rated input power	21 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	170
Total Lumen	2040
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	117.9
Total Lumen	1414.5
T <sub>a</sub>	25

**ETC130-GB-CC LED COLOR CHANGER**

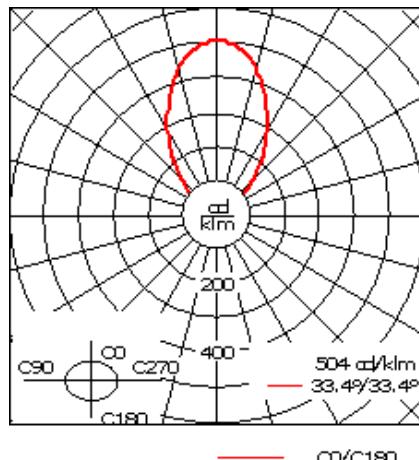
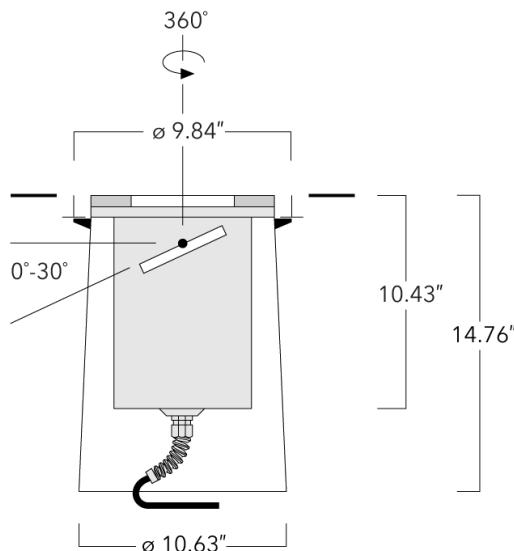
---

be specified separately.

Example: XXX-XXXX-9004 (Black).

+ XXX-XXXX (Accessory 1)

## ETC130-GB-CC LED COLOR CHANGER

**Specifications****Material description**

Body	Luminaire body constructed of deep drawn stainless steel, outer housing of composite material
Lens	5/8" thick clear tempered glass lens. Max. load 5000kg/11,000 lbs.
Colors	Stainless Steel
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+

**Electrical description**

Power supply	Integral DMX 120V-277V Driver
Driver / Ballast	Integral driver
Power factor	> 0.9

**Additional information**

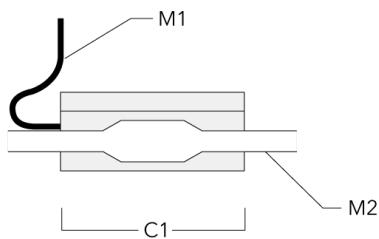
Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

## ETC130-GB-CC LED COLOR CHANGER

## Electrical Accessories

## Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	$\varnothing$ 0.39	$\varnothing$ 0.47 - 0.75



## ETC130-GB-CC LED COLOR CHANGER

**Control****DMX Wireless Antenna**

Description	Part ID
Antenna RF1.8dB	430-0018

**DMX Controller**

Description	Part ID	Additional information
DMX Controller	400-0469	IP20. DIN Rail system. Is designed for either live or stand-alone control. It features one DMX universe, a USB connection, 128k flash memory for storing stand-alone programs.

**DMX Controller (smart)**

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an intuitive and easy-to-use keypad for one DMX universe. It can store up to 36 scenes; alternatively, via ....



## ETC130-GB-CC LED COLOR CHANGER

## DMX Booster Box

Description	Part ID
DMX Booster Box for DMX cable system	400-9006



## ETC130-GB-CC LED COLOR CHANGER

## DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



## DMX Wireless Transceiver

Description	Part ID
DMX Wireless Transceiver	400-0476



## ETC130-GB-CC LED COLOR CHANGER

## DMX Termination Plug

Description	Part ID
DMX Termination Plug	400-0475

