



Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. Darklight anodised aluminium reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White Technology. DALI Interface. The luminaire is factory- sealed and does not need to be opened during the installation.

Suitable for mounting up to max. 40 mm ceiling thickness. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.



A maximum of one internal optical accessory.

The luminaire is not suitable for chlorine containing environments e.g. swimming pool. Special version suitable for chlorine containing environments, on request. Must be specified at time of ordering.

|                    |                                  |
|--------------------|----------------------------------|
| Weight             | 2.80 kg                          |
| Light distribution | symmetric, wide beam [B]         |
| Light source       | LED-FT-24W / 700mA - 2700-6000 K |
| CRI                | 80                               |
| Power supply       | EC                               |
| LEDs               | 1                                |
| Rated input power  | 27 W                             |

|                   |        |
|-------------------|--------|
| Rated lumens (lm) |        |
| LED Lumen         | 1856.5 |
| Total Lumen       | 1856.5 |
| Ta                | 25     |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 2702 |
| Total Lumen        | 2702 |
| Tc                 | 25   |

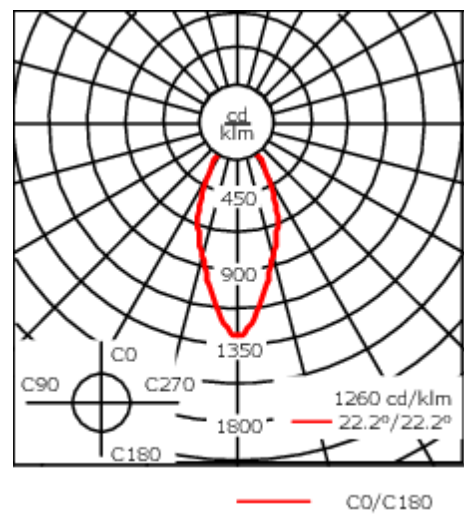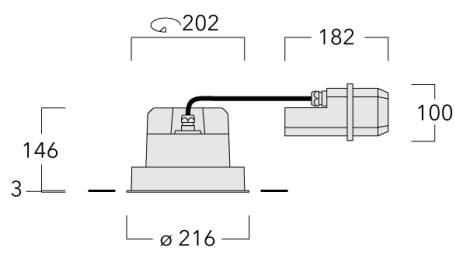

Specifications

Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Safety glass lens  |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket  |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware  |
| Ingress protection   | IP66   |
| Impact resistance    | IK07   |
| Corrosion resistance | 5CE  |

Electrical description

|                  |                     |
|------------------|---------------------|
| Power supply     | 220-240V / 50-60 Hz |
| Driver / Ballast | DALI                |
| Power factor     | > 0.9               |


Additional information

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L70B50 > 50000h |
| Energy efficiency class | E (Light source)       |

Mounting Accessories


Installation blackout, proud

| Description | Part ID  | A   | B   | C1  | D1  |
|-------------|----------|-----|-----|-----|-----|
| BD014-I     | 134-1763 | 443 | 324 | 192 | 216 |

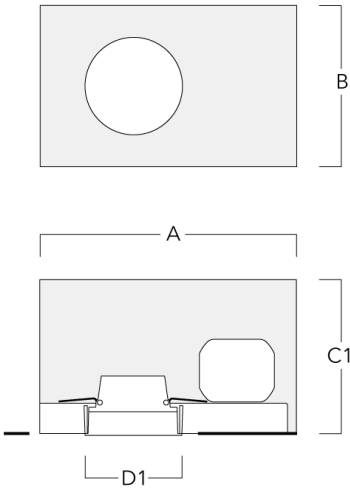

Installation blackout, flush with shadow line

| Description | Part ID  | A   | B   | C1  | D1  | D2  |
|-------------|----------|-----|-----|-----|-----|-----|
| BD014-III   | 134-1764 | 443 | 324 | 192 | 216 | 267 |

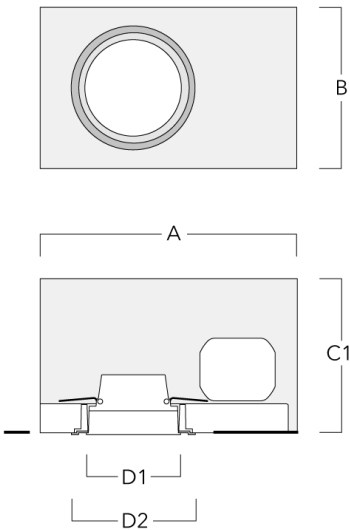

Optical Accessories


Linear spread lens

| Description          | Part ID  | C1  |
|----------------------|----------|-----|
| IO-180-DOC140-LED-FT | 134-1816 | 171 |



Flood lens

| Description          | Part ID  | C1  |
|----------------------|----------|-----|
| IO-360-DOC140-LED-FT | 134-1818 | 171 |



Wallwash lens

| Description            | Part ID  | C1  |
|------------------------|----------|-----|
| IO-20-WW-DOC140-LED-FT | 134-1817 | 171 |

