



Description

RGBW Colour Changer. IP67. Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.


Luminaire installation blackout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	12.00 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/25W - RGBW
CRI	20/80
Power supply	EC
LEDs	12
Rated input power	26 W

Nominal Lumen (lm)	
LED Lumen	247.5
Total Lumen	2970
Tj	85

Rated lumens (lm)	
LED Lumen	171.1
Total Lumen	2053.3
Ta	25

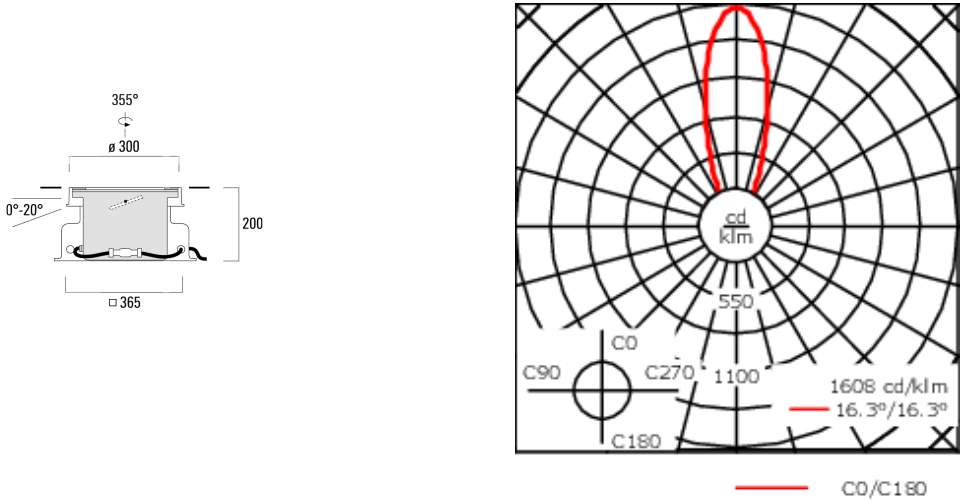

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<div><div></div>Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter with DMX Interface
Termination	Junction box supplied

Additional information

Warranty	
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.

Mounting Accessories

Installation cover


Description	Part ID	C1
Installation cover BE	185-0326	300



Optical Accessories


Optical Adaptor

Description	Part ID
Internal optical Adaptor IA	185-7419




Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7581	149



Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-7582	149



Linear louvre

Description	Part ID	C1
Linear louvre IL	185-9568	149



Control

DMX Wireless Antenna

Description	Part ID
Antenna RF1.8dB	430-0018
Antenna RF5dB	430-0036

DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



DMX Wireless Transceiver

Description	Part ID
DMX Wireless Transceiver	400-0476

