

**Description**

Surface-mounted wall luminaire.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	7.70 lb
Light distribution	asymmetric, forward throw [A60]
Light source	LED-3/13W / 1400 mA - 4000 K
CRI	80
Power supply	electronic gear
BUG	B0 U0 G0
LEDs	3
Rated input power	14 W



Nominal Lumen (lm)

LED Lumen	575
Total Lumen	1725
T _j	85

Delivered lumens (lm)

LED Lumen	172.2
Total Lumen	516.7
T _a	25

SLS410 LED

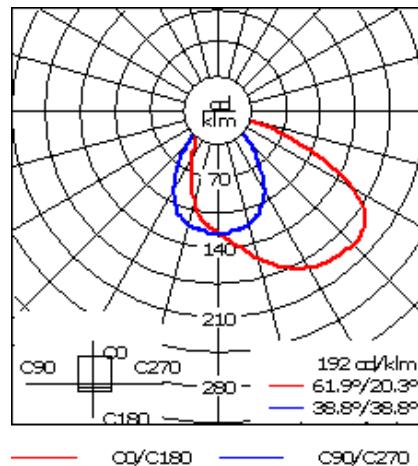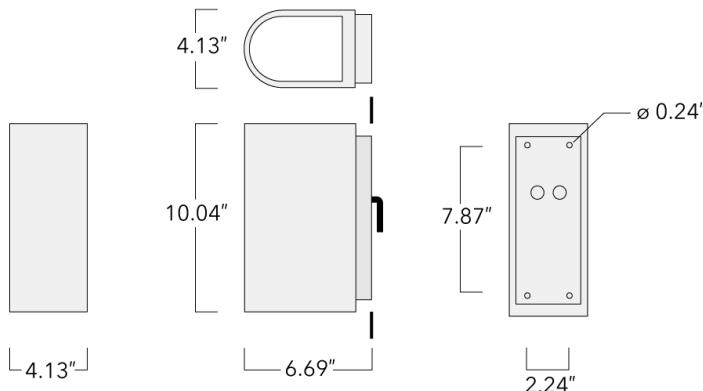

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 10px; background-color: #a9a9a9; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 10px; background-color: #e0e0e0; margin-right: 10px;"></div> RAL9016 White <div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Integral EC electronic converter


Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

Mounting Accessories

Column fitter

Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	≥ 5.51	8.66	3.94	0.24	1.32

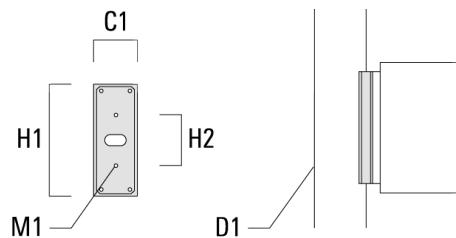

SLS410 LED

Surface Collar

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	$\varnothing 1$	$\varnothing 1.5$	$\varnothing 0.38$	6	2

