





### Description

IP66. Class I. Class II on request. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire can be mounted for up or down lighting.

Weight	2.60 kg
Light distribution	symmetric, narrow beam [E]
Light source	LED-6/12W / 700 mA - 3000 K
CRI	80
Power supply	EC
BUG	B1 U0 G0
LEDs	6
Rated input power	14.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	1740
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	219
Total Lumen	1313.8
T <sub>a</sub>	25

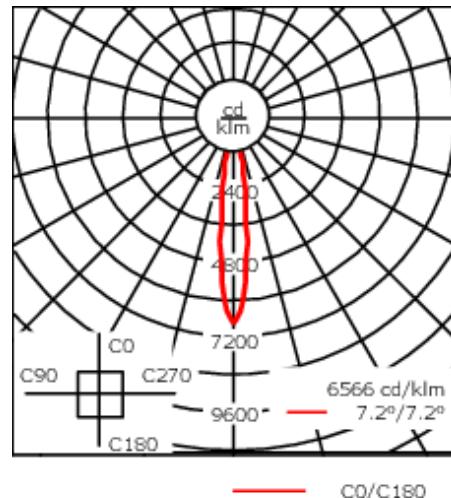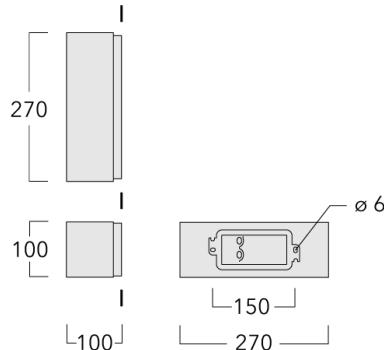

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: black; border: 1px solid black;"></span>  RAL9004 Signal black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #c0c0c0; border: 1px solid black;"></span>  RAL9006 White aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #808080; border: 1px solid black;"></span>  RAL9007 Grey aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #333333; border: 1px solid black;"></span>  RAL7016 Anthracite grey         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #e0e0e0; border: 1px solid black;"></span>  RAL9016 Traffic white         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Power factor	> 0.9
Surge protection	1/2 kV

### **Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---


## Optical Accessories

### Colour correction filter

Description	Part ID
IF-3000K > 2400K	131-9707

### Honeycomb louvre

Description	Part ID
IW-RLS420	131-9706



## Control

### DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).  Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear	90

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!