




Description


IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

Weight	3.50 kg
Light distribution	diffused distribution
Light source	LED-FT-28W / 800 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	31 W
Rated lumens (lm)	
LED Lumen	1675.3
Total Lumen	1675.3
Та	25
Nominal Lumen (lm)	
LED Lumen	4570
Total Lumen	4570
Tc	25



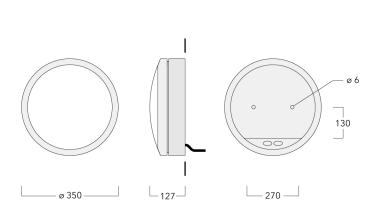



Specifications

Material description

Body Marine-grade die-cast aluminium alloy

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK10

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime Ta=40° L70B50 > 50000h

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement

located on www.we-ef.com for further details.