

STO134 LED Stainless Steel



Description

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	2.64 lb
Light distribution	diffused distribution
Light source	LED-5W / 250 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	5.6 W



Delivered lumens (lm)

LED Lumen	75.4
Total Lumen	75.4
Ta	25

Nominal Lumen (lm)

LED Lumen	720
Total Lumen	720
Tc	25

STO134 LED Stainless Steel

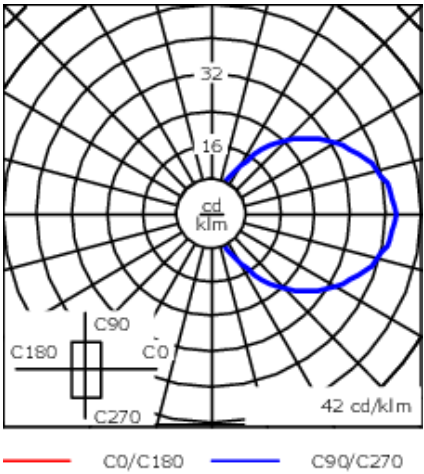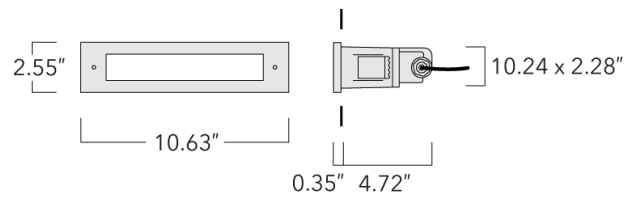

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colors	<div></div> Stainless Steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter


Additional information

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

Mounting Accessories

Installation blackout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation blackout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98

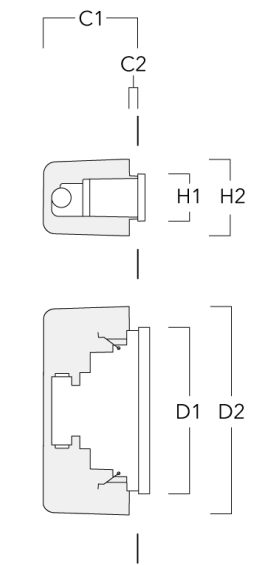

Installation blackout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

