

STO134 LED Shallow Depth - Stainless Steel



Description



IP66. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

Weight	0.95 kg
Light distribution	diffused distribution
Light source	LED-5W / 250 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	5.6 W

Rated lumens (lm)	
LED Lumen	75.4
Total Lumen	75.4
Ta	25

Nominal Lumen (lm)	
LED Lumen	720
Total Lumen	720
Tc	25

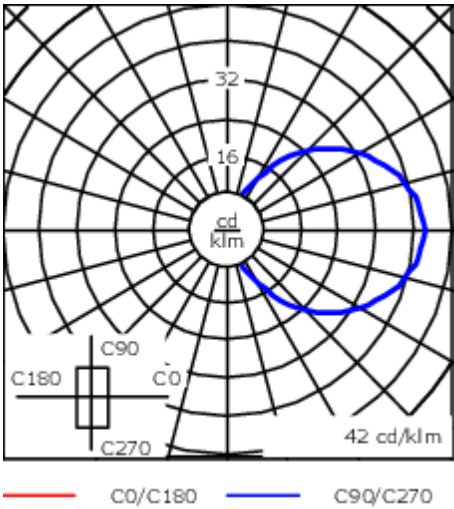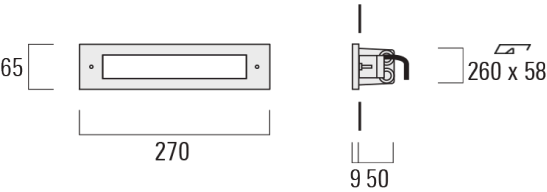

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy with polished stainless steel frame
Lens	Polycarbonate
Colours	<div><div></div> Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

Additional information