



### Description



IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens, UV-stabilised. Integral EC electronic converter in thermally separated compartment. DALI. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available. To be specified at time of ordering.

Optional 1-10V version available. To be specified at time of ordering.

Supplied as a complete luminaire (luminaire head and standpipe). Please note: The standpipe height must be entered for the photometric calculation.

Weight	10.80 kg
Light distribution	asymmetric, side throw beam [S60]
Light source	LED-15W / 750 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	18 W
<b>Rated lumens (lm)</b>	
LED Lumen	1166.3
Total Lumen	1166.3
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	1829
Total Lumen	1829
Tc	25

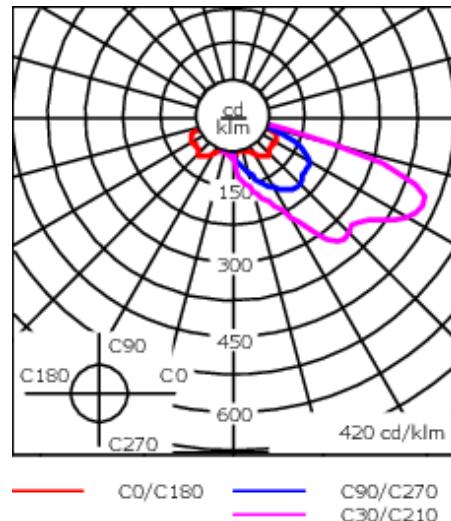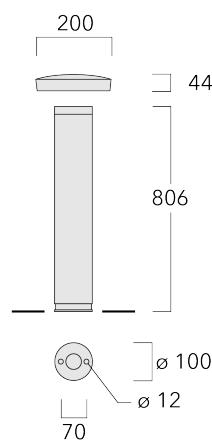

## Specifications

### Material description

Body	Marine-grade, all-aluminium construction. Pole section features anodised aluminium core
Lens	Polycarbonate, UV-stabilised
Colours	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: black;"></span> RAL9004 Signal black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #c0c0c0;"></span> RAL9006 White aluminium         </div> </div> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #808080;"></span> RAL9007 Grey aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #333333;"></span> RAL7016 Anthracite grey         </div> </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #e0e0e0;"></span> RAL9016 Traffic white         </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter, DALI
Surge protection	10/10kV

### **Additional information**

---

Lifetime Ta=25<sup>0</sup> L70B50>50000h

ENERGY EFFICIENCY E-F-D (Light source)

CLASS

---

## Control

### DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).  Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear	90

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!

## Mounting Accessories

### Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	Weight (kg)
Planted root ESZ4	300-9090	55	45	70	100	400	350	3.50

