#### **FLC230 LED COLOR CHANGER**



#### **Description**

RGBW/RGBA Color Changer.

IP66. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands; one for power, one for DMX. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. DMX interface.

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Weight	17.00 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-4x6/42W - RGBA
CRI	20
Power supply	electronic gear
LEDs	6
Rated input power	44 W
Nominal Lumen (lm)	
LED Lumen	490
Total Lumen	2940
Tj	85
Delivered lumens (lm)	
LED Lumen	424.6
Total Lumen	2547.3
Та	25


# **FLC230 LED COLOR CHANGER**

we-ef

Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

#### **FLC230 LED COLOR CHANGER**

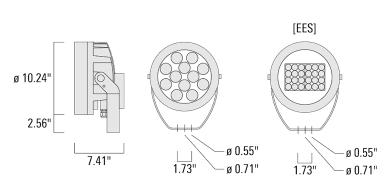



# Specifications

# **Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors

RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE superior corrosion protection system

Windage 0.684

# we-ef

#### **FLC230 LED COLOR CHANGER**

# **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V.

Driver / Ballast Integral EC electronic converter with DMX Interface

Power factor > 0.9

Surge protection Integral 10kV Surge Protector

#### **Additional information**

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration


Rating for Bridge and Overpass Applications.

# **FLC230 LED COLOR CHANGER**


# **Mounting Accessories**

# Floodlight mounting bracket TA


Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA1 Mounting bracket, single (Ø 4.25	147-0096		5.12	4.25 x 8	4.25	16.53	108 x 200
x 8)							




TA2 Mounting bracket, double (Ø	147-0097	5.12	4.25 x 8 4.25	16.53	108 x 200	
4.25 x 8)						




Description	Part ID	А	C1	D × L1	L	Weight (lb)	D×S
TA2-L Mounting bracket, double (Ø	147-0148	±90°	16.54	4.25 x 8	4.25	44.53	108 x 200
4.25 x 8)							




TA2-L Mounting bracket, double (Ø 3	147-0105	±90° 16.5	4 3 x 8	2.99 35.49	76 x 200	
x 8)						




Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA3 Mounting bracket, triple (Ø 3.50	147-0025	±90°	25.59	3.50 x 8	3.5	39.46	89 x 200
x 8)							




TA3 Mounting bracket, triple (Ø 4.25	147-0098	±90°	25.59"	4.25 x 8	53.35 lbs	108 x 200
x 8)						




Description	Part ID	А	C1	D × L1	L	Weight (lb)	$D \times S$
TA4 Mounting bracket, quad (Ø 3.50	147-0099	±90°	25.59	3.50 x 8		45.86 lbs	89 x 200
x 8)							







TA4 Mounting bracket, quad (Ø 4.25	147-0100	±90°	25.59	4.25 x 8	53.00	108 x 200
x 8)						



Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA2 Mounting bracket, double (Ø 3 x	147-0024		5.12	3 x 8	2.99	4.2 lbs	76 x 200
8)							




TA1 Mounting bracket, single (Ø 3 x	147-0023	5.12	3 x 8	2.99 4.19	76 x 200
8)					




# **FLC230 LED COLOR CHANGER**

# **Pole clamp TS**


Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0526	4.0-4.50	3.53	102-114
4.0"-4.5")				




TS1-2/M12 Pole clamp, single (Ø	147-0544	114-133	3.75	114-133	
4.5"-5.25")					




Description	Part ID	D1	Weight (lb)	D	
TS1-2/M12 Pole clamp, single (Ø	147-0543	3.0-3.50	3.31	76-89	
3"-3.5")					



TS2-2/M12 Pole clamp, double (Ø	147-0545	3.0"-3.5"	3.09 lbs	76-89
3"-3.5")				




Description	Part ID	D1	Weight (lb)	D
TS2-2/M16 Pole clamp, double (Ø 4.5"-5.25")	147-0546	4.50-5.25	3.53	114-133



# **Planted root**


Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.54



# **FLC230 LED COLOR CHANGER**

# Pole top caps KF


Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-60/M16 Spigot Cap (Ø 2.36")	310-9120	2.36	2.36 x 4	4.4 lbs	60 x 100




KF16-76/M16 Spigot Cap (Ø 3.0")	310-9121	3	3 x 4	1.10 lbs	76 x 100
---------------------------------	----------	---	-------	----------	----------



Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-89/M16 Spigot Cap (Ø 3.5")	300-0734	3.50	3.5 x 3	1.10 lbs	89




KF16-108/M16 Spigot Cap (Ø 4.25") 300-0735 4.25 4.25 x 3 4.4 lbs 108




# **FLC230 LED COLOR CHANGER**

# **Short post EM**

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-M16 AL	270-0001	6.3"	5.12"	8"	0.35"	4.85 lbs




# **Surface Mount Canopy SMC**




# **FLC230 LED COLOR CHANGER**

# **Pole clamp PC**


Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (Ø	139-2703	3.0-3.50	2.20
3"-3.5")			



PC1 76-89/60 Pole clamp, single (Ø	139-2702	3.0-3.50	2.20
3"-3.5")			



Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double	139-2707	4.0-4.50	2.65
(Ø 4"-4.5")			




PC1 102-114/60 Pole clamp, single (Ø 4"-4,5")

139-2706


4.0-4.50

2.65





Description	Part ID	D1	Weight (lb)
PC2 114-133/60 Pole clamp, double	139-2709	4.5-5.25	3.10
(Ø 4.5"-5.25")			




PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")


139-2708

4.5-5.25

3.10




Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double	139-2705	3.20-4.30	2.40
(Ø 3.25"-4.25")			




PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")

139-2704

3.20-4.30 2.40





# **FLC230 LED COLOR CHANGER**

# **Optical Accessories**

# **Glare shield**

Description	Part ID	Α	C1
ES-FLC230-LED	139-1852	6.26	10.47



EC EL COOO CO LED	400 (070	, 00	40 47
ES-FLC230-CC-LED	139-6970	A ')()	10.47
1.3-61(./.30-(.(111)	1.)7-()7/()	()./7	10.47






# **FLC230 LED COLOR CHANGER**

#### Snoot

Description	Part ID	Α	C1
ET-FLC230-LED	139-1853	6.3	10.47



ET-FLC230-CC-LED	139-6974	6.29	10.47



# **Linear spread lens**

Description	Part ID	C1
IO-180-FLC230-LED	139-1849	7.80



# **Softening Lens**

escription Part ID	C1
-360-FLC230-LED 139-1850	7.80






# **FLC230 LED COLOR CHANGER**

# Wallwash lens

Description	Part ID	C1
IO-20-FLC230-LED	139-1848	7.83





# **FLC230 LED COLOR CHANGER**

# **Control**

# **DMX Controller**

Description	Part ID
DMX Controller	400-0469

# **DMX Controller (smart)**

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to
		36 scences; alternatively, via





#### **DMX Booster Box**

Description	Part ID	
DMX Booster Box	400-0474	



# **DMX Termination Plug**

Description	Part ID	
DMX Termination Plug	400-0475	



# we-ef

# **FLC230 LED COLOR CHANGER**

# **DMX Plug and Socket**

Description	Part ID
DMX Plug and Socket	400-0479



### **DMX Combination Cable**

Description	Part ID	
DMX Combination Cable	400-0480	



# **FLC230 LED COLOR CHANGER**

# **DMX Wireless Repeater**

Description	Part ID
DMX Wireless Repeater	400-0477



# **DMX Wireless Transceiver**

Description	Part ID	
DMX Wireless Transceiver	400-0476	

