

134-2306

we-ef

DAS140-PM LED PENDANT MOUNT



Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------------|
| Weight | 12.10 lb |
| Light distribution | symmetric, wide beam [W] |
| Light source | LED-24/48W / 700 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 24 |
| Rated input power | 55 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 233 |
| Total Lumen | 5592 |
| Tj | 85 |

Rated lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 176.8 |
| Total Lumen | 4242.4 |
| Ta | 25 |



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

134-2306



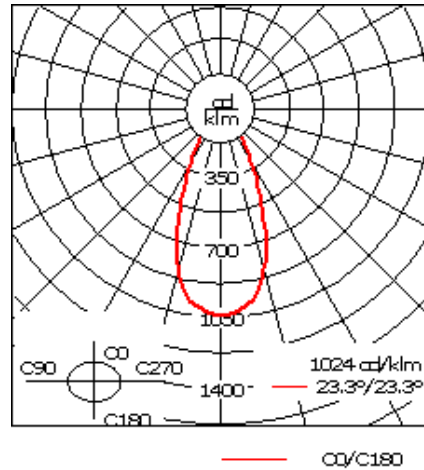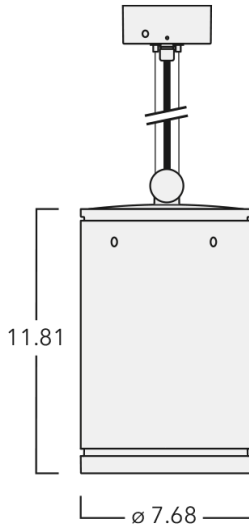

we-ef

DAS140-PM LED PENDANT MOUNT



Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, all aluminium construction |
| Lens | Safety glass lens |
| Colors |  RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Power factor | >0.9 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

134-2306

we-ef

DAS140-PM LED PENDANT MOUNT

Additional information

Lifetime Ta=25°/40° L90B10 > 90000h

Listings Contact WE-EF USA for ETL/UL certification status.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

DAS140-PM LED PENDANT MOUNT


Optical Accessories

Honeycomb louvre

| Description | Part ID | Additional information | C1 |
|---------------|----------|--|------|
| IW-DAC120-LED | 134-2002 | Honeycomb louvre, matt black Teflon® coated. For luminaires equipped with [W] [M] light distribution. A maximum of one internal optical accessory. Internal component, factory installed. | 4.05 |



| | |
|---------------|----------|
| IW-DA_140-LED | 134-2066 |
|---------------|----------|




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DAS140-PM LED PENDANT MOUNT


Linear spread lens

| Description | Part ID |
|-------------------|----------|
| IO-180-DAC140-LED | 134-2064 |



Wallwash lens

| Description | Part ID |
|---------------------|----------|
| IO-20-WW-DAC140-LED | 134-2065 |



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DAS140-PM LED PENDANT MOUNT

Mounting Accessories

Adaptor for side conduit entry

| Description | Part ID | A | C1 |
|-----------------------------------|----------|------|------|
| DA14 Adaptor for DAC140/DAS140-PM | 134-2109 | 1.20 | 7.70 |

