

134-2318

DAS140-PM TW LED

**we-ef**



### Description

IP66, Class I. Class II on request. IK07. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 0.5 - 1.5 m. To be specified at time at ordering. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Tunable White Technology. The luminaire is factory-sealed and does not need to be opened during installation.

Other standardised housing lengths available on request.

Weight	5.50 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-24/42W / 325 mA - 2700-6000K
CRI	80
Power supply	EC
LEDs	24
Rated input power	51 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	250
Total Lumen	6000
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	180.9
Total Lumen	4340.7
T <sub>a</sub>	25

### WE-EF LEUCHTEN GmbH



Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0  
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

134-2318



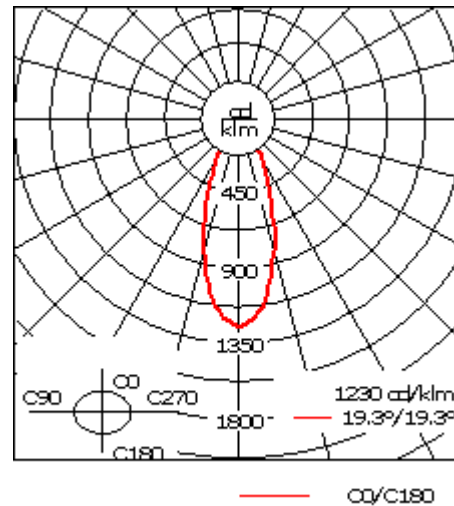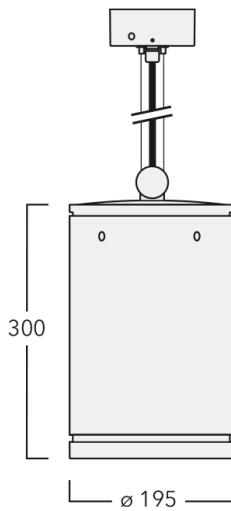


DAS140-PM TW LED

**we-ef**



## Specifications

### Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

### Electrical description

Driver / Ballast	DALI
------------------	------

### Additional information

Energy efficiency class	C-D (Light source)
-------------------------	--------------------

#### WE-EF LEUCHTEN GmbH


Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0  
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

## Optical Accessories


## Honeycomb louvre

Description	Part ID	Additional information	C1
IW-DAC120-LED	134-2002	Honeycomb louvre, matt black Teflon® coated. For luminaires equipped with [B] [M] light distribution. A maximum of one internal optical accessory. Internal component, factory installed.	103



IW-DA\_140-LED

134-2066




## DAS140-PM TW LED

## Linear spread lens

---

Description	Part ID
IO-180-DAC140-LED	134-2064

---




## Wallwash lens

---

Description	Part ID
IO-20-WW-DAC140-LED	134-2065

---



### Mounting Accessories

#### Adaptor for side conduit entry

---

Description	Part ID	A	C1
DA14 Adaptor for DAC140/DAS140-PM	134-2109	31	195

---

