

RMT320 LED Two-sided



Description


IP66. Post top LED luminaire. Integrated heat sinks. Easy removal and replacement of LED board. CAD-optimized OLC PMMA lens for multi-layer illumination and superior glare control.

Weight	0.00 lb
Light distribution	[R65] Type IV Medium
Light source	LED-12/24W / 700 mA - 3000 K
CRI	70
Power supply	electronic gear
LEDs	12
Rated input power	27 W

Nominal Lumen (lm)	
LED Lumen	330
Total Lumen	3960
Tj	85

Delivered lumens (lm)	
LED Lumen	271
Total Lumen	3251.5
Ta	25

RMT320 LED Two-sided

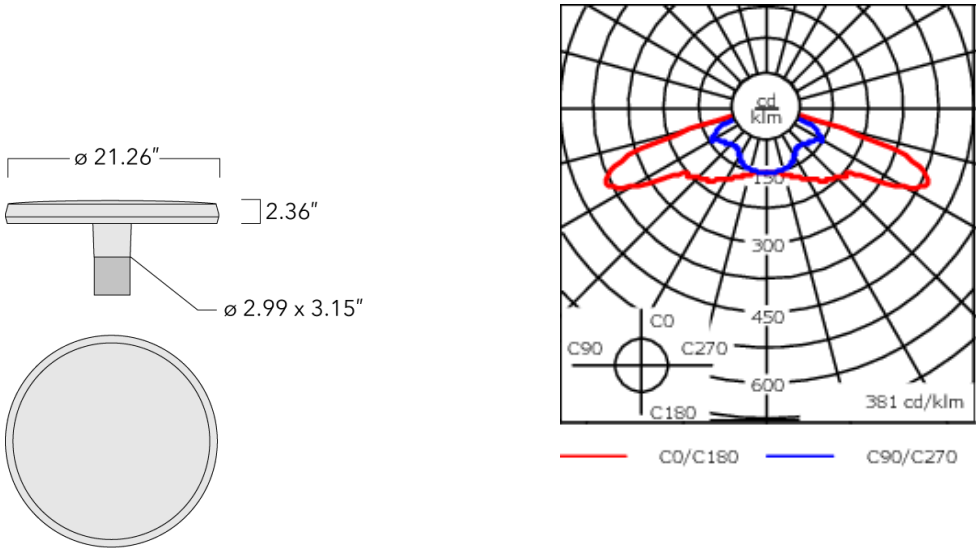

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	RFC® Reflection Free Contour technology
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

RMT320 LED Two-sided

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------