

FLC321 Wall bracket

**Description**

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.

12W, 18W, 26W / 120-277V / 0-10V Dimming.

24VDC low voltage versions, ON-OFF. (available upon request)

Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.

Remote 24VDC power supply to be ordered separately.

Optical accessories are factory-installed. To be specified at time of ordering.

Weight	9.00 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-6/26W / 1400 mA - 3000K
CRI	80
Power supply	electronic gear
LEDs	6
Rated input power	27 W



Nominal Lumen (lm)

LED Lumen	550
Total Lumen	3300
T _j	85

Delivered lumens (lm)

LED Lumen	408.9
Total Lumen	2453.5
T _a	25

FLC321 Wall bracket

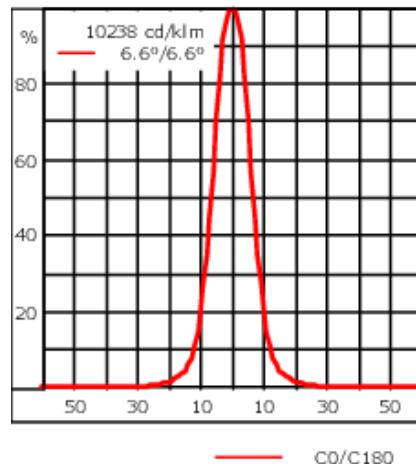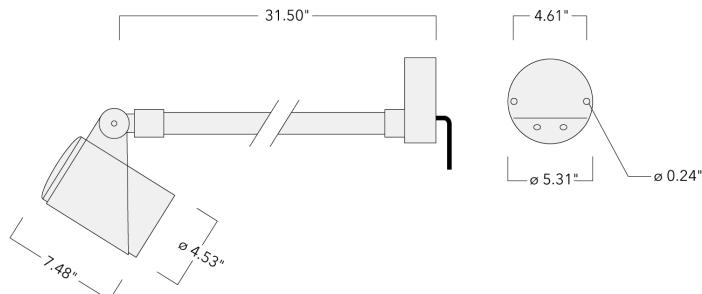

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 10px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 10px; background-color: #D9D9D9; margin-right: 10px;"></div> RAL9016 White
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.969 ft ²

Electrical description

Driver / Ballast	120-277V AC/50-60 Hz (24VDC available upon request)
------------------	---

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

FLC321 Wall bracket**Control****DALI interface**


Description	Part ID
Low voltage DALI interface	0026

0-10 V, 24VDC low voltage version

Description	Part ID
24VDC low voltage version, 0-10 V	0033


FLC321 Wall bracket**Optical Accessories****Softening Lens**

Description	Part ID	C1
Flood lens IO-360	145-9992	3.43




FLC321 Wall bracket**Linear spread lens**

Description	Part ID	C1
Linear spread lens IO-180	145-9991	3.43


**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	145-9993	3.43




FLC321 Wall bracket**Honeycomb louvre**

Description	Part ID	C1
Honeycomb louvre IW	145-9994	3.43

**Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-9995	2.17	4.49

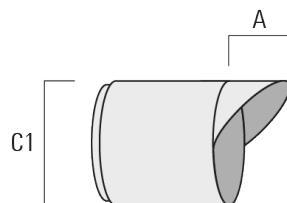

FLC321 Wall bracket

Snoot

Description	Part ID	A	C1
Snoot ET	145-9996	2.20	4.49

