

## FLC311 Surface mounted

**Description**

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. One cable entry.



Mains voltage versions: DALI interface Class I.

24VDC low voltage versions: ON-OFF Class III.

Remote 24VDC power supply to be ordered separately.

Weight	2.20 kg
Light distribution	symmetric, very narrow beam, sharp cut-off [EES]
Light source	LED-3/6W / 180 mA - 4000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	7.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	260
Total Lumen	780
Tj	85
<b>Rated lumens (lm)</b>	
LED Lumen	218.9
Total Lumen	656.8
Ta	25

**FLC311 Surface mounted**

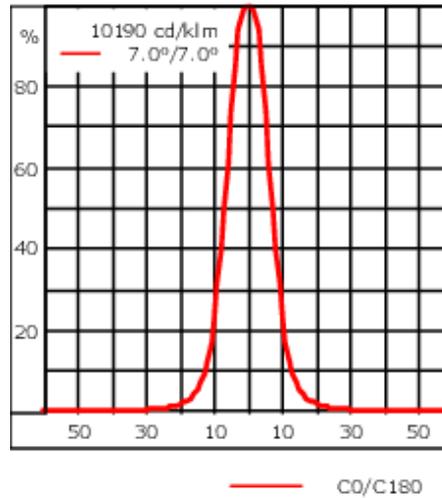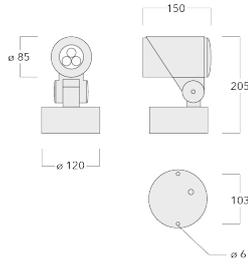

**Specifications**

**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Signal black</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> <span>RAL9006 White aluminium</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <span>RAL9007 Grey aluminium</span> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.025 m <sup>2</sup>

**Electrical description**

Driver / Ballast	DALI
Power factor	>0.9

**Additional information**

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

**FLC311 Surface mounted**

---

**Control****Eco Step Dim® Advanced**

Description	Part ID
Eco Step Dim® Advanced LED	430-0002

---

**1-10 V analogue dimming interface**

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

---

---

**DALI interface**

Description	Part ID
Low voltage DALI interface	0026

---

**0-10 V, 24VDC low voltage version**


Description	Part ID
24VDC low voltage version, 0-10 V	0033

---

**Mounting Accessories**


**Planted root**

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

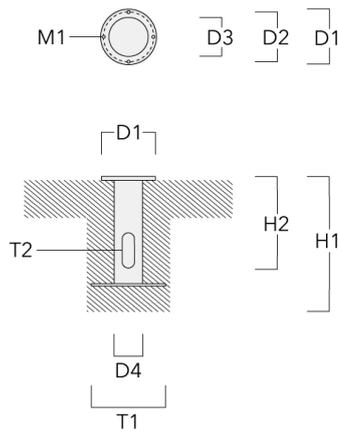

**Short post EM**


Description	Part ID	A	B	C1	D1	Weight (kg)
Short post EM1 for FLC311/321	146-7169	26	200	120	160	1.80

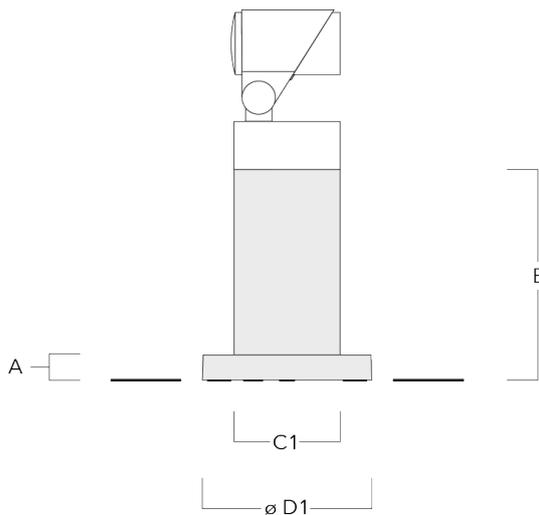


**FLC311 Surface mounted**

**Pole clamp SP**

Description	Part ID	D1	Weight (kg)
Pole clamp SP1-M5, single (Ø 38-60)	146-7201	38-60	1.20

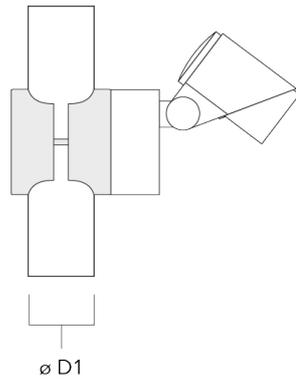


Pole clamp SP1-M5, single (Ø 76-89)	146-7202	76-89	1.10
-------------------------------------	----------	-------	------

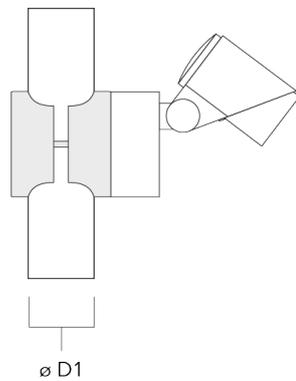


**FLC311 Surface mounted**

Description	Part ID	D1	Weight (kg)
Pole clamp SP2-M5, double (Ø 38-60)	146-7203	38-60	1.30

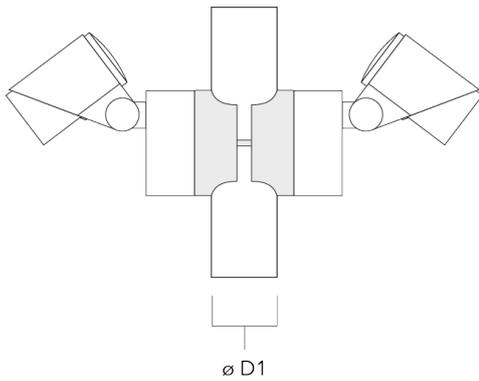

Pole clamp SP2-M5, double (Ø 76-89)	146-7204	76-89	1.20
-------------------------------------	----------	-------	------

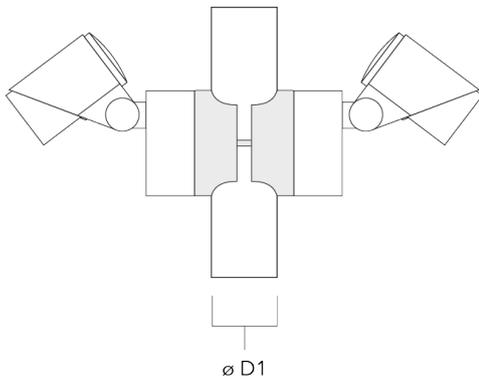

**FLC311 Surface mounted**

---


**Optical Accessories**

**Surface wash lens**

---

Description	Part ID	C1
Flood lens IO-360 for [EE]	145-7786	59


---



---

Flood lens IO-360 for [EES]	145-7780	59
-----------------------------	----------	----


---



**FLC311 Surface mounted**


**Linear spread lens**

Description	Part ID	C1
Linear spread lens IO-180	145-7781	59



**Wallwash lens**


Description	Part ID	C1
Wallwash lens IO-20	145-7782	59



**FLC311 Surface mounted**


**Honeycomb louvre**

Description	Part ID	C1
Honeycomb louvre IW	145-7783	59



**Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-7784	34	85

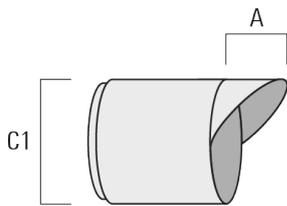

**FLC311 Surface mounted**

---

**Snoot**

---

Description	Part ID	A	C1
Snoot ET	145-7785	34	85

---

