

### Description

RGBW/RGBA Colour Changer. IP66. Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. DMX interface. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Weight	13.30 kg
Light distribution	controlled symmetric distribution [C50]
Light source	LED-36/95W/230mA - RGBA (PCA)
CRI	20
Power supply	ECG [DMX]
LEDs	36
Rated input power	99 W



### Nominal Lumen (lm)

LED Lumen	245
Total Lumen	8820
Tj	85

### Rated lumens (lm)

LED Lumen	200.7
Total Lumen	7225
Ta	25

## CFT540-CC LED

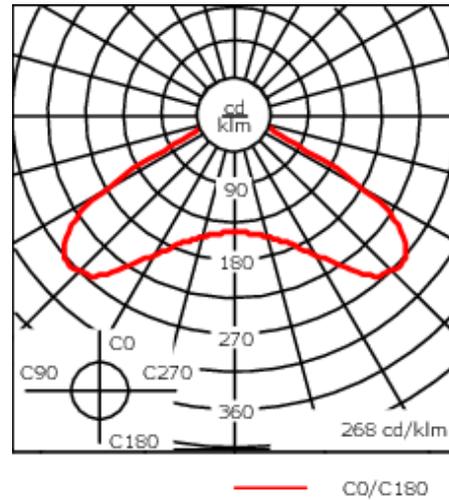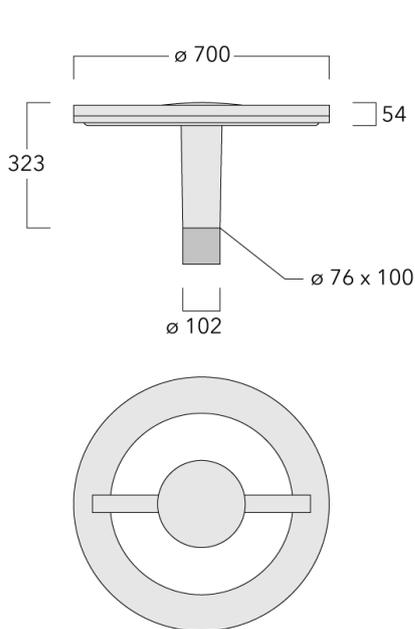

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA RFC® Reflection Free Contour technology
Colours	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <div>RAL9004 Signal black</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> <div>RAL9006 White aluminium</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <div>RAL9007 Grey aluminium</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #333333; margin-right: 5px;"></div> <div>RAL7016 Anthracite grey</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> <div>RAL9016 Traffic white</div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.24 m <sup>2</sup>

## Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter. DMX
Power factor	> 0.9
Surge protection	6/6 kV (optional SP10)

**105-0340**

**we-ef**

**CFT540-CC LED**

---

**Additional information**

---

Lifetime Ta=25° L90B10 > 90000h

ENERGY EFFICIENCY CLASS C-D (Light source)

---

**105-0340**

**CFT540-CC LED**

---

**Electrical Accessories**

**DMX Luminaire**

---

Description	Part ID
DMX Communication IN&OUT + Power Supply Cable	430-0012

---

**Control**

**DMX Wireless Antenna**

---

Description	Part ID
Antenna RF 5dB	430-0036
Antenna RF1.8dB	430-0018

---