we-ef

FLC230 LED COLOR CHANGING FRAMING PROJECTOR



Description

RGBW/RGBA Color Changer Profile Projector [FP] for framing applications, polygon shape.

Spherical/triple flat convex lens system. Aperture angle ranges from 14.6-19.8°.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. PMMA LED lens array. Integral driver, thermally separated. Factory-installed LED circuit board. RGBW/RGBA LED. DMX interface.

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Weight	11.10 lb
Light distribution	symmetric Framing-Projector [FP]
	- max aperture angle
Light source	LED-FT-44W/RGBA
CRI	20
Power supply	electronic gear
LEDs	1
Rated input power	46 W
Delivered lumens (lm)	
LED Lumen	907.9
Total Lumen	907.9
Та	25
Nominal Lumen (lm)	
LED Lumen	3900
Total Lumen	3900
Tc	25

we-ef

FLC230 LED COLOR CHANGING FRAMING PROJECTOR


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

we-ef

FLC230 LED COLOR CHANGING FRAMING PROJECTOR

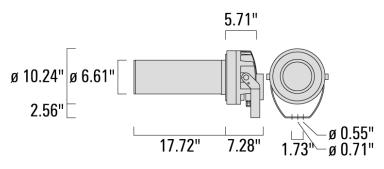



Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE superior corrosion protection system

Windage 1.073



FLC230 LED COLOR CHANGING FRAMING PROJECTOR

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V.

Driver / Ballast Integral EC electronic converter with DMX Interface

Power factor > 0.9

Surge protection Integral 10kV Surge Protector

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h


Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.




Mounting Accessories

Floodlight mounting bracket TA


Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA1 Mounting bracket, single (Ø 4.25	147-0096		5.12	4.25 x 8	4.25	16.53	108 x 200
x 8)							




TA2 Mounting bracket, double (Ø 3 x	147-0024	5.12	3 x 8	2.99 4.19	76 x 200
8)					




Description	Part ID	Α	C1	D × L1	L	Weight (lb)	D×S
TA2-L Mounting bracket, double (Ø	147-0148	±90°	16.54	4.25 x 8	4.25	44.53	108 x 200
4.25 x 8)							

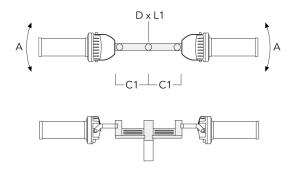


TA2-L Mounting bracket, double (Ø 3	147-0105	±90°	16.54	3 x 8	2.99	35.49	76 x 200
x 8)							

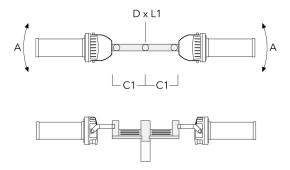


Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA3 Mounting bracket, triple (Ø 3.50	147-0025	±90°	25.59	3.50 x 8	3.5	39.46	89 x 200
x 8)							

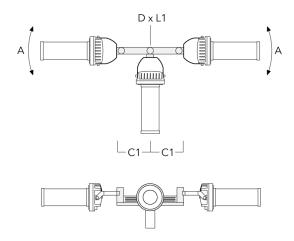


TA3 Mounting bracket, triple (Ø 4.25 147-0098 $\pm 90^{\circ}$ 25.59" 4.25 x 8 53.35 lbs 108 x 200 x 8)

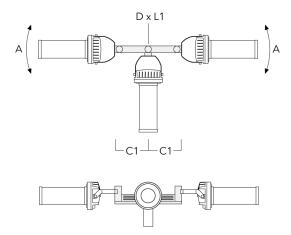

Description	Part ID	Α	C1	D × L1	L	Weight (lb)	D × S
TA4 Mounting bracket, quad (Ø 3.50	147-0099	±90°	25.59	3.50 x 8		45.86 lbs	89 x 200
x 8)							

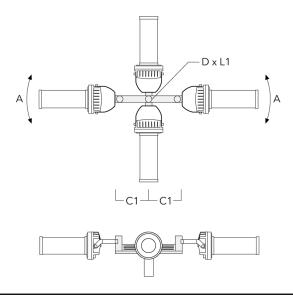


TA4 Mounting bracket, quad (Ø 4.25 147-0100 $\pm 90^{\circ}$ 650 4.25 x 8 53.00 108 x 200 x 8)

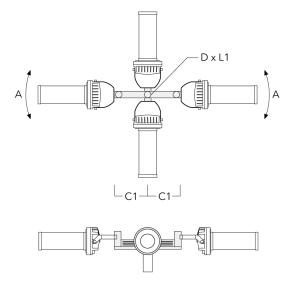




Pole clamp TS

Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0526	4.0-4.50	3.53	102-114
4.0"-4.5")				




TS1-2/M12 Pole clamp, single (Ø	147-0544	114-133	3.75	114-133
4.5"-5.25")				




Description	Part ID	D1	Weight (lb)	D
TS2-2/M16 Pole clamp, double (Ø	147-0527	4.0-4.50	3.31	102-114
4.0"-4.5")				

76-89

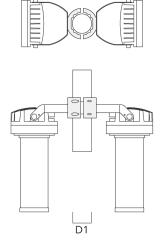


TS2-2/M12 Pole clamp, double (Ø 147-0545 3.0"-3.5" 3.09 lbs 3"-3.5")

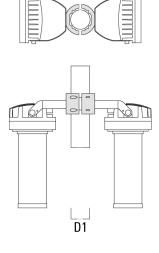


Description	Part ID	D1	Weight (lb)	D
TS2-2/M16 Pole clamp, double (Ø 4.5"-5.25")	147-0546	4.50-5.25	3.53	114-133

3.31

76-89

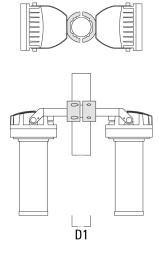


TS1-2/M12 Pole clamp, single (Ø	147-0543	3.0-3.50
3"-3 5")		






Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	2.36	3.50	15.75	13.78	.31	8.44



Pole top caps KF


Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-60/M16 Spigot Cap (Ø 2.36")	310-9120	2.36	2.36 x 4	4.4 lbs	60 x 100






FLC230 LED COLOR CHANGING FRAMING PROJECTOR

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-76/M16 Spigot Cap (Ø 3.0")	310-9121	3	3 x 4	1.10 lbs	76 x 100




\mathcal{L}	KF16-89/M16 Spigot Cap (Ø 3.5")	300-0734	3.50	3.5 x 3	1.10 lbs	89
---------------	---------------------------------	----------	------	---------	----------	----






FLC230 LED COLOR CHANGING FRAMING PROJECTOR

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-108/M16 Spigot Cap (Ø 4.25")	300-0735	4.25	4.25 x 3	4.4 lbs	108



Short post EM

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-M16 AL	270-0001	6.3"	5.12"	8"	0.35"	4.85 lbs







FLC230 LED COLOR CHANGING FRAMING PROJECTOR

Pole clamp PC


Description	Part ID	D1	Weight (lb)
PC1 76-89/60 Pole clamp, single (Ø	139-2702	3.0-3.50	2.20
3"-3.5")			



PC2 76-89/60 Pole clamp, double (Ø 139-2703 3.0-3.50 2.20 3"-3.5")




Description	Part ID	D1	Weight (lb)
PC1 82-109/60 Pole camp, single (Ø	139-2704	3.20-4.30	2.40
3.25"-4.3")			




PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25")

139-2705

3.20-4.30 2.40



Description	Part ID	D1	Weight (lb)
PC1 102-114/60 Pole clamp, single	139-2706	4.0-4.50	2.65




PC2 102-114/60 Pole clamp, double (Ø 4"-4.5")

139-2707

4.0-4.50

2.65


,



D1



Description	Part ID	D1	Weight (lb)
PC1 114-133/60 Pole clamp, single	139-2708	4.5-5.25	3.10
(Ø 4.5"-5.25")			



PC2 114-133/60 Pole clamp, double

139-2709

4.5-5.25 3.10

(Ø 4.5"-5.25")

