



Description

IP55. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

2700 K option available on request.



Weight	0.00 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-6/12W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W

Nominal Lumen (lm)

LED Lumen	310
Total Lumen	1860
T _j	85

Rated lumens (lm)

LED Lumen	266.6
Total Lumen	1599.7
T _a	25

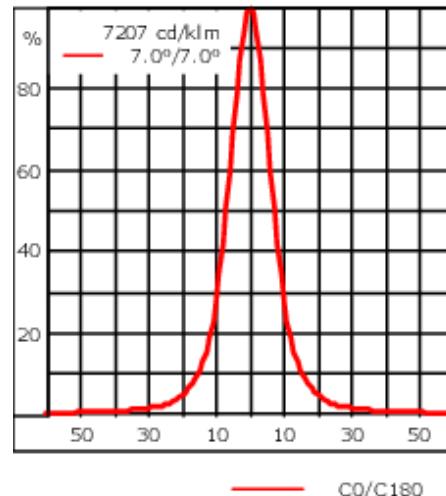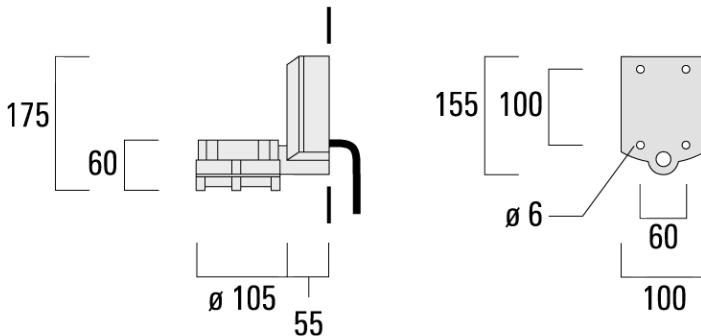

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: inline-block; width: 100px; height: 15px; background-color: black;"></div> RAL9004 Signal black <div style="display: inline-block; width: 100px; height: 15px; background-color: #c0c0c0;"></div> RAL9006 White aluminium <div style="display: inline-block; width: 100px; height: 15px; background-color: #808080;"></div> RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP55
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment


Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
-----------------	--

Optical Accessories

Snoot

Description	Part ID	A	C1
Snoot ET	145-0030	60	120



Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	102	119

