



Description

IP67. IK07. Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy. Construction helps to prevent accumulation of insects, leaves and debris on lens and restricts glare to passers-by. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 0.5 m of flexible PVC-free cable.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.

Weight	18.70 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-24/36W / 500 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W



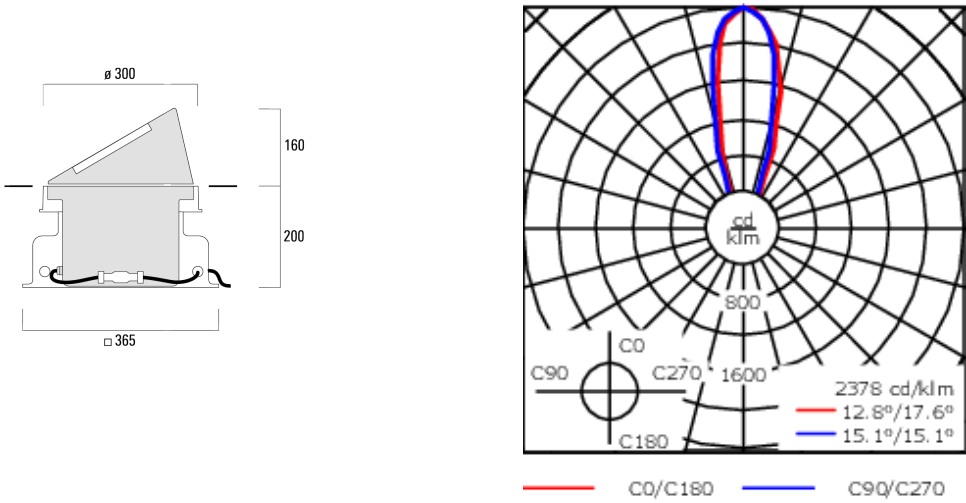

Nominal Lumen (lm)	
LED Lumen	215
Total Lumen	5160
Tj	85

Rated lumens (lm)	
LED Lumen	146.3
Total Lumen	3510.1
Ta	25



Specifications

Material description

Body	Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy		
Lens	Safety glass lens		
Colours		RAL9004 Signal black	
		RAL9007 Grey aluminium	
		RAL7016 Anthracite grey	
		RAL9016 Traffic white	
Gasket	Silicone rubber gasket		
Fasteners	PCS hardware		
Ingress protection	IP67		
Impact resistance	IK07		
Corrosion resistance	5CE		

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Control**DALI interface**

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300

