

### Description

IP66. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. RFC™ Reflection Free Contour main lens. Silicone CCG® Controlled Compression Gasket. Luminaires are factory-sealed and does not need to be opened during installation.

Integral electronic converter with DALI interface. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

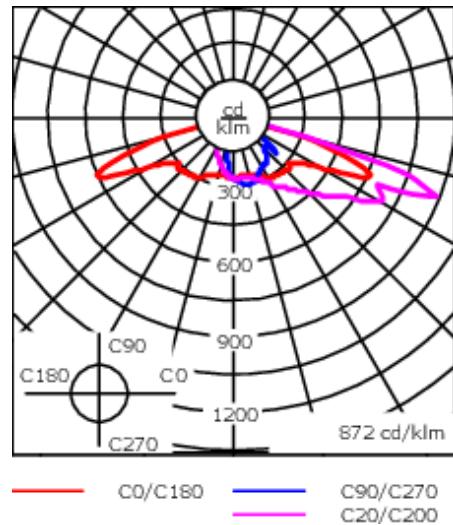
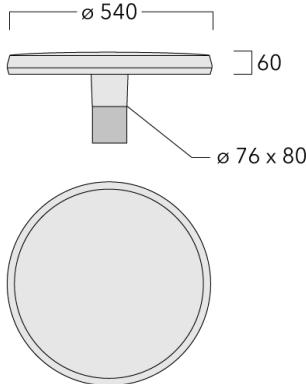
Including 0.5 m cable with a cable connector.

Maximum spacing for pathway and streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height.

Wild-Light options available on request.

Weight	8.00 kg
Light distribution	asymmetric, side throw [S70]
Light source	LED-12/52W / 1400 mA - 3000 K
CRI	80
Power supply	EC
BUG	B1 U0 G1
LEDs	12
Rated input power	53 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	550
Total Lumen	6600
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	477.4
Total Lumen	5728.8
T <sub>a</sub>	25

## RMT320 One-sided

**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	RFC™ Reflection Free Contour main lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: black; border: 1px solid black;"></span>  RAL9004 Signal black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #808080; border: 1px solid black;"></span>  RAL9007 Grey aluminium       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #333333; border: 1px solid black;"></span>  RAL7016 Anthracite grey       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #F0F0F0; border: 1px solid black;"></span>  RAL9016 Traffic white       </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE

**Electrical description**

Driver / Ballast	Integral electronic converter with DALI interface
------------------	---

**Additional information**

BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare
------------	--

## Control

### R2C Ready to Connect

Description	Part ID
R2C Ready to Connect (top)	430-0019