


Description

IP66, Class I. IK07. Surface mounted LED wall luminaire. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming on request. Suitable for installation over 4" recessed junction box. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

ADA (American Disabilities Act) Compliant.

| Weight | 4.20 lb |
|-----------------------|----------------------------|
| Light distribution | symmetric, narrow beam [N] |
| Light source | LED-3/6W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| BUG | B1 U0 G0 |
| LEDs | 3 |
| Rated input power | 7.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 310 |
| Total Lumen | 930 |
| _Tj | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 234.1 |
| Total Lumen | 702.2 |
| Та | 25 |

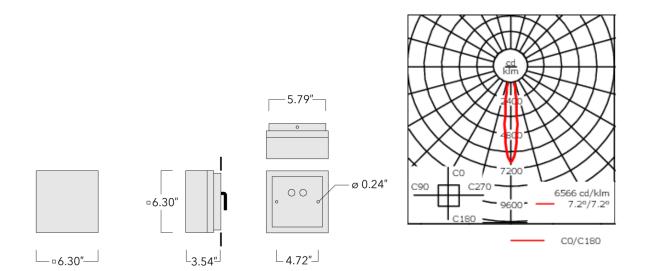

Specifications Material description

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

10 (E7007 Grey Wictaine

RAL9016 White

RAL8019 Dark Bronze

Silicone CCG® Controlled Compression Gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Gasket

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

131-9421



QLS410 LED

Additional information

| Lifetime | Ta=25°/40° L90B10 > 90000h |
|------------|---|
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings | ETL listed. Suitable for wet locations. |

131-9421

QLS410 LED



Mounting Accessories

Surface Collar

| Description | Part ID | А | В | C1 | D1 | D2 | D3 | M1 | M2 |
|-----------------------|----------|-----|-----|------|----|----|-------|----|----|
| QLS410 Surface Collar | 131-6000 | 6.3 | 6.3 | 1.75 | ø1 | ø2 | Ø0.38 | 5 | 5 |