

## CFT530 LED

**Description**

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Recommended mounting height 10 - 13 ft, depending on wattage selected.



Specify product with 7 Digit product code - Finish Color. (Other accessories, such as mounting, optical, and electrical, must be specified separately.).

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessories)

Weight	21.61 lb
Light distribution	[C50] Type V Short
Light source	LED-24/48W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
BUG	B2 U0 G1
LEDs	24
Rated input power	54 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	6960
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	260.5
Total Lumen	6251.1
T <sub>a</sub>	25

## CFT530 LED

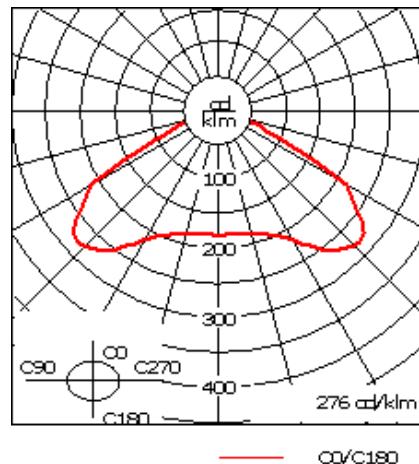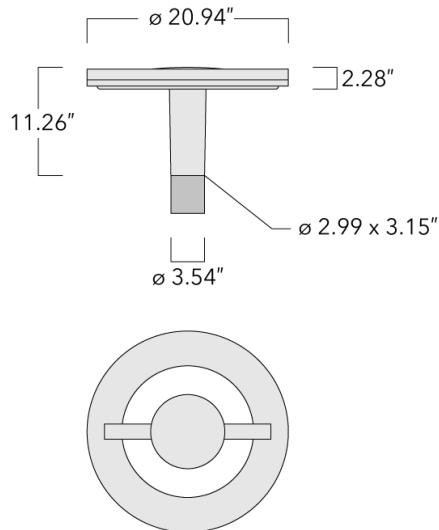

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA RFC® Reflection Free Contour technology
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #F0F0F0; border-radius: 50%;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #800000; border-radius: 50%;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.16 m <sup>2</sup>

## CFT530 LED

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	In-line bracket 10kV Surge Protector

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---