




#### **Description**


IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Weight	4.90 kg
Light distribution	symmetric, narrow beam [E]
Light source	LED-6/12W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W
Nominal Lumen (lm)	
LED Lumen	310
Total Lumen	1860
Tj	85
Rated lumens (lm)	
LED Lumen	234.1
Total Lumen	1404.4
Та	25



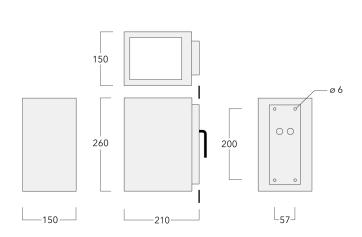



# **Specifications Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE+Primer

### **Electrical description**

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

## **Additional information**


Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement
	located on www.we-ef.com for further details.



# **Mounting Accessories**

## **Column fitter**

Description	Part ID	C1	D1	H1	H2	M1	Weight (kg)
CF-410/420	131-9140	83	≥ 140	220	100	6	0.60



131-9158





## **Control**

# 1-10 V analogue dimming interface

scription	С
0 V analogue dimming interface	9(