


### Description

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

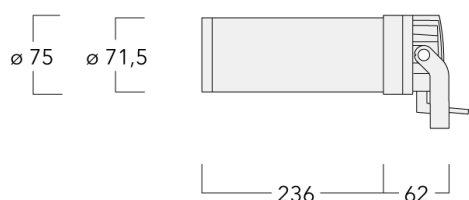

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Energy efficiency	D-E (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options**

**Light distribution**



[FP] symmetric Framing-Projector


**Colour temperature**



2700K



3000K




4000K

**Nominal Watt**

6 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [FP] symmetric Framing-Projector	139-2752	LED-1/6W/2700K	394.6 lm	6 W	80
	139-2752	LED-1/6W/2700K	373.3 lm	6 W	80
	139-2753	LED-1/6W/3000K	394.6 lm	6 W	80
	139-2753	LED-1/6W/3000K	373.3 lm	6 W	80
	139-2754	LED-1/6W/4000K	424 lm	6 W	80
	139-2754	LED-1/6W/4000K	401.1 lm	6 W	80