




**Description**

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Glass LED lens array. Factory installed LED circuit board. Integral electronic control gear, thermally separated.

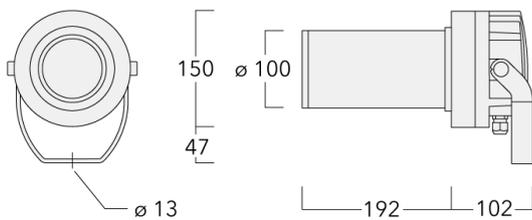

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK05		

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV (optional SP10, only for ON/OFF)
Energy efficiency	F (Light source)

### Additional information

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




2700K

18 W

26 W




3000K



4000K

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP]</p>	139-2504	LED-1/18W/2700K	1190.3 lm	18 W	80
	139-2504	LED-1/18W/2700K	1286.6 lm	18 W	80
	139-2475	LED-1/18W/3000K	1231.4 lm	18 W	80
	139-2475	LED-1/18W/3000K	1330.9 lm	18 W	80
	139-2476	LED-1/18W/4000K	1298.1 lm	18 W	80
	139-2476	LED-1/18W/4000K	1403 lm	18 W	80
	139-2507	LED-1/26W/2700K	1636.7 lm	26 W	80
	139-2507	LED-1/26W/2700K	1769 lm	26 W	80
	139-2481	LED-1/26W/3000K	1690.6 lm	26 W	80
	139-2481	LED-1/26W/3000K	1827.3 lm	26 W	80
	139-2482	LED-1/26W/4000K	1780.3 lm	26 W	80
	139-2482	LED-1/26W/4000K	1924.3 lm	26 W	80