




Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request.

Integral EC electronic converter in thermally-separated compartment. Glass LED lens array. Factory installed LED circuit board.

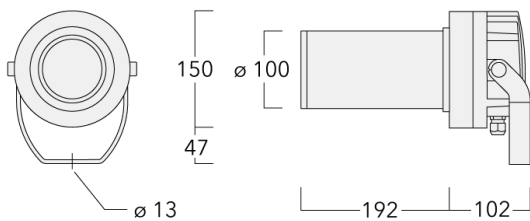

Specifications

Material description

Colours	RAL9004 Signal black	RAL9007 Grey aluminium	RAL7016 Anthracite grey	RAL9016 Traffic white
Ingress protection	IP66			
Impact resistance	IK05			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10, only for ON/OFF)
Energy efficiency	F (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------


Options

Light distribution



[ZP] symmetric Zoom-Projector


Colour temperature



Nominal Watt

18 W
26 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2502	LED-1/18W/2700K	1190.3 lm	18 W	80
	139-2502	LED-1/18W/2700K	1286.6 lm	18 W	80
	139-2496	LED-1/18W/3000K	1231.4 lm	18 W	80
	139-2496	LED-1/18W/3000K	1330.9 lm	18 W	80
	139-2497	LED-1/18W/4000K	1298.1 lm	18 W	80
	139-2497	LED-1/18W/4000K	1403 lm	18 W	80
	139-2505	LED-1/26W/2700K	1636.7 lm	26 W	80
	139-2505	LED-1/26W/2700K	1769 lm	26 W	80
	139-2477	LED-1/26W/3000K	1690.6 lm	26 W	80
	139-2477	LED-1/26W/3000K	1827.3 lm	26 W	80
	139-2478	LED-1/26W/4000K	1780.3 lm	26 W	80
	139-2478	LED-1/26W/4000K	1924.3 lm	26 W	80