






**Description**

RGBW/RGBA Colour Changer Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

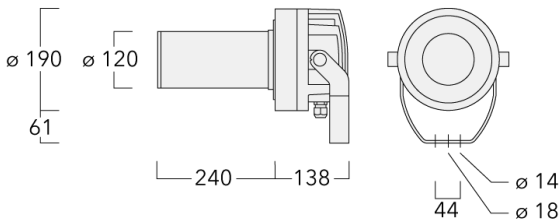

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter, thermally separated. PMMA LED lens array. Factory-installed RGBW/RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/ colours. DMX interface. For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1,5 + DMX".

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

### Additional information

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




4000K+RGBW

24 W

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2297	LED-1/24W/4000K+RGBW	490.1 lm	24 W	80
	139-2297	LED-1/24W/4000K+RGBW	763.2 lm	24 W	80
	139-2329	LED-1/24W/RGBA	461.8 lm	24 W	80
	139-2329	LED-1/24W/RGBA	719.2 lm	24 W	80