




**Description**

RGBW/RGBA Colour Changer Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

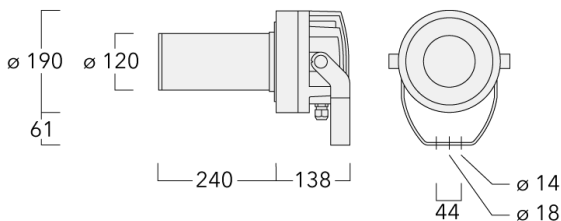

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter, thermally separated. PMMA LED lens array. Factory-installed RGBW/RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/ colours. DMX interface.

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey
	<b>RAL9016</b> Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[ZP] symmetric Zoom-Projector

4000K+RGBW

24 W

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2295	LED-1/24W/4000K+RGBW	490.1 lm	24 W	80
	139-2295	LED-1/24W/4000K+RGBW	763.2 lm	24 W	80
	139-2327	LED-1/24W/RGBA	719.2 lm	24 W	80
	139-2327	LED-1/24W/RGBA	461.8 lm	24 W	80