


### Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

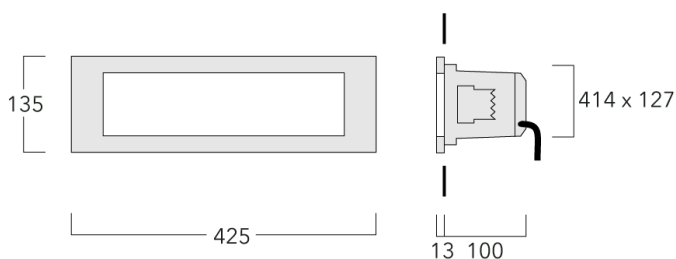

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Polycarbonate lens			
Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey
	<b>RAL9007</b> Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK10			
Corrosion resistance	5CE			




### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

### Additional information

Listings	Special version with VA stainless steel frame available
Lifetime	Ta=25° L80B10 > 54000h

**Options**

Light distribution	Colour temperature	Nominal Watt
□	 3000K	21 W
	 4000K	
	 2700K	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	133-0447	LED-9/21W/2700K	747.5 lm	21 W	80
	133-0352	LED-9/21W/3000K	802.5 lm	21 W	80
	133-0353	LED-9/21W/4000K	857.4 lm	21 W	80